




TOTALLY DEFEND - TDIWE

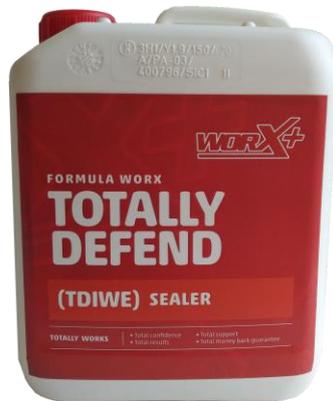

As part of the Formula Worx range of floor treatment products, TDIWE (Totally Defend Impregnating Waterbased Enhancer), is a high-performance, eco friendly, proprietary blend, impregnating water-based sealer, specifically designed for use on all natural and engineered stone / masonry surfaces including concrete where sustainability and ease of use is a priority.

USE:

Defend indoor and outdoor polished concrete and natural stone surfaces from stains, acids, water, fats and oils, enhancing inherent colour properties.

FEATURES & BENEFITS:

- Eco friendly option for sustainability focused projects.
- Outstanding application ease due to low surface residue and quick dry times.
- Enriches the natural colour properties of natural stone, terrazzo, masonry and concrete surfaces.
- Improves stain, acid, oils, fat and water resistance.
- Increases the longevity of concrete and stone floors.
- Non sticky/tacky application.
- High UV resistance.
- Low odour for sensitive installation environments.
- Food grade safe once cured.
- Non-topical.
- Non-yellowing.
- Reduces slip co-efficient of treated floor.

SPECS:

Unique WORX+ formulation.



PREPARATION:

Apply TDIWE to a completed polished surface.
The surface to be treated must be completely dry and clean.

APPLICATION:

1. Apply TDIWE using a brush, microfiber applicator, roller or airless sprayer (with low pressure - max. 1 bar) on a clean surface.
2. Apply once or twice to surface depending on level of material porosity. If applying twice, use wet-on-wet application method.
3. Do not allow to puddle. Remove excess material with a cloth.
4. Product can be buffed when it appears dry, (normally 15-30 minutes following application).
5. Water repellency properties generally develop 4-6 hours following application.

ADDITIONAL INFORMATION:

- Consult Safety Data Sheet / MSDS prior to using material.
- TDIWE does not present any health hazards when applied as per label and precautions outlined in Safety Data Sheet.
- Test a small area before use to verify protection and appearance.
- Expected coverage rates of material will range between 1 – 50m² per litre of TDIWE per application depending on porosity of surface being treated and application method (e.g. roller compared to sprayer).